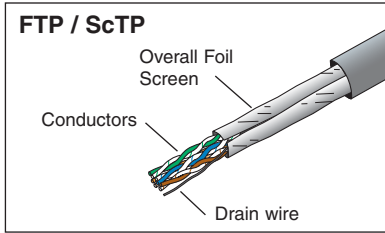
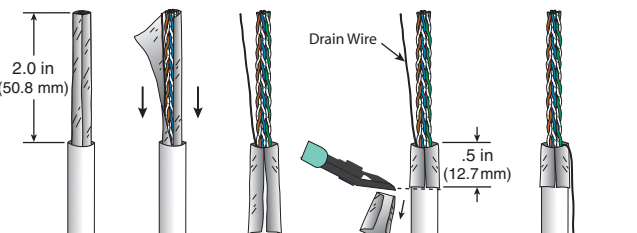
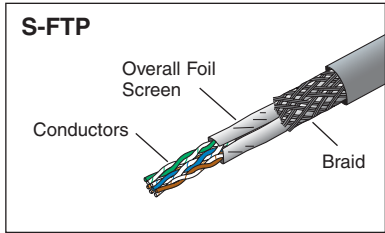
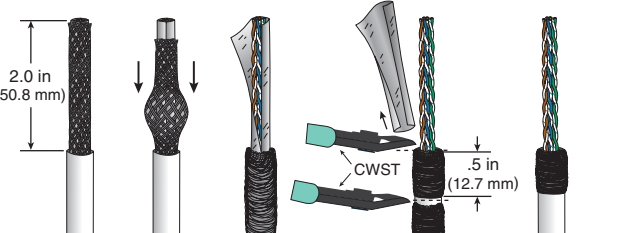
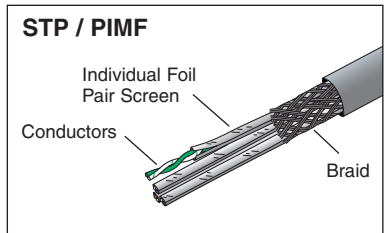
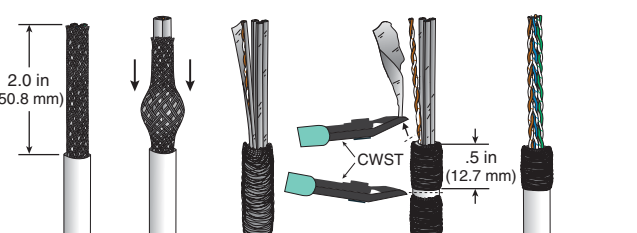


Strain Relief Collar


Wire Cap
White - TX6 PLUS
Red - TX5e

Jack

<p>FTP / ScTP</p>  <p>Overall Foil Screen Conductors Drain wire</p>	 <p>2.0 in (50.8 mm) Drain Wire .5 in (12.7 mm)</p>
<p>S-FTP</p>  <p>Overall Foil Screen Conductors Braid</p>	 <p>2.0 in (50.8 mm) CWST .5 in (12.7 mm)</p>
<p>STP / PIMF</p>  <p>Individual Foil Pair Screen Conductors Braid</p>	 <p>2.0 in (50.8 mm) CWST .5 in (12.7 mm)</p>


TERMINATION STEPS

- 1**

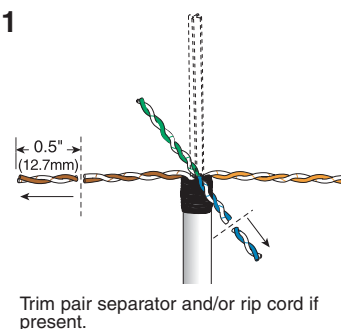


Trim pair separator and/or rip cord if present.


2

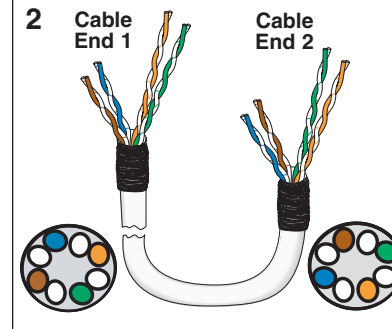


3

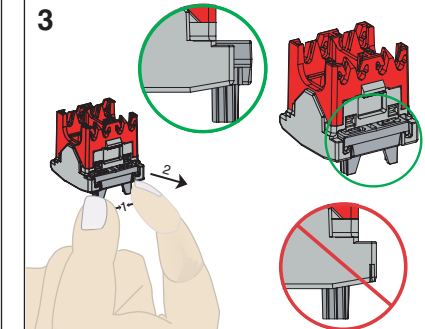


4

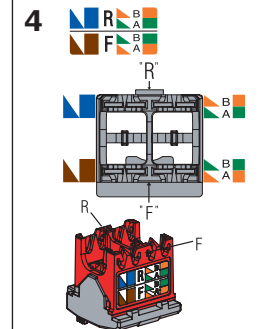
- 5**

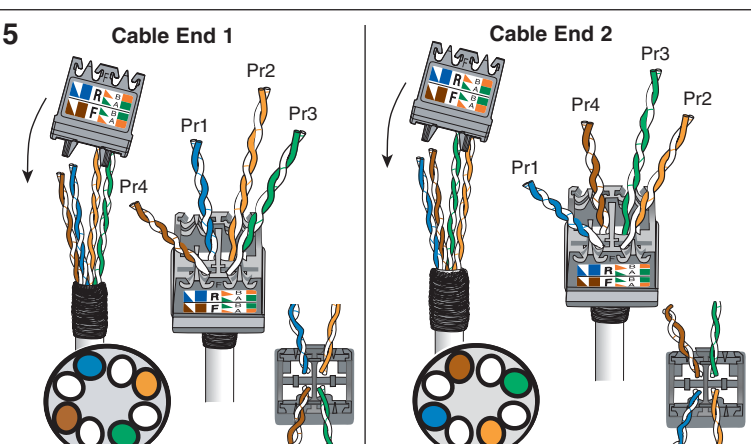

6

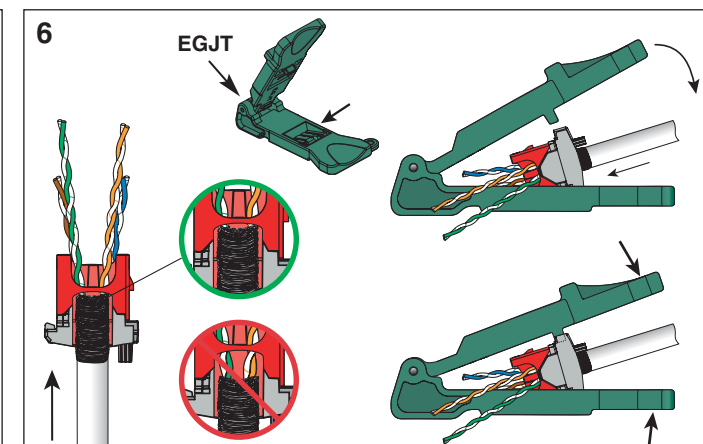

Note: For bulk packaged TG Style Jack Modules add -24 to end of part number.

** Denotes color.

For Technical Support: www.panduit.com/resources/install_maintain.asp

7

T568B
Cable End 1

T568A
Cable End 1

Cable End 2

Cable End 2

See note 4.

8

CWST

FTP/ScTP Drain Wire

9

10

EGJT

11

12

CJSGK-X KIT See note 5

REMOVAL STEPS

1

2

3

Notes:

1. For specified performance, follow TIA/EIA 568-C installation guidelines.
2. Jack Modules can terminate 22-26 AWG solid or stranded IWC data cable with 0.062 inch (1.57 mm) maximum insulated conductor outside diameter.
3. Jack Modules may be re-terminated a minimum of 20 times.
4. On cable end 2 for A & B wiring and cable end 1 of A wiring, wrap the designated pairs around the proper center dividing post (A or B) and terminate in the proper location.
5. CJSGK-X Grounding Kit is REQUIRED for all Mini-Com Modular Patch Panels, but is optional for Mini-Com All Metal Shielded Modular Patch Panels.
6. For technical and performance information, consult Panduit Technical Support.

As with all Wiring Accessories, the following statements apply:

1. Never install communications wiring during a lightning storm.
2. Never install communications wiring in wet locations unless the jack is specifically designed for use in wet locations.
3. Never touch uninsulated communications wiring or terminals unless the communication line has been disconnected at the network interface.
4. Use caution when installing or modifying communication wiring.

For Instructions in Local Languages
and Technical Support:

http://www.panduit.com/resources/install_maintain.asp

PANDUIT

www.panduit.com

E-mail:
info@panduit.com

Fax:
(708) 444-6993