



客戶承認書
SPECIFICATION FOR APPROVAL

CUSTOMER: _____ STD _____

DESCRIPTION: _____ DC FAN _____

CUSTOMER P/N: _____ REV: _____

DELTA MODEL: _____ KSB0505HA-G303 _____ REV: 00 _____

SAMPLE ISSUE DATE: _____ 07/11/2013 _____

QUANTITY: _____

**PLEASE SIGN BACK ONE COPY OF THIS SPECIFICATION
AFTER COMPLETION OF APPROVAL**

APPROVED BY: _____

DATE: _____

DELTA ELECTRONICS COMPONENTS (WUJIANG) LTD.

FAN/MOTOR PLANT

No.1688 Jiangxing East Road, WuJiang Economy Development Zone

Wujiang City JiangSu Province, P. R. C.

TEL:86-512-63406008

FAX:86-512-63015608

No.1688 Jiangxing East Road
WuJiang Economy Development Zone
Wujiang City Jiang Su Province,P.R.C.

TEL : 86-512-63406008
FAX : 86-512-63015608

STATEMENT OF DEVIATION

NONE

DESCRIPTION :

DELTA DOC CENTER

No.1688 Jiangxing East Road
Wujiang Economy Development Zone
Wujiang City Jiang Su Province,P.R.C.

TEL : 86-512-63406008
FAX : 86-512-63015608

SPECIFICATION FOR APPROVAL

Customer: STD

Description: DC FAN

Customer P/N: REV:
Delta Model NO.: KSB0505HA-G303 Delta Safety Model NO: KSB0505HA
Sample Rev: 00 Issue NO:
Sample Issue Date: JUL-11-2013 Quantity:

1. SCOPE:

THIS SPECIFICATION DEFINES THE ELECTRICAL AND MECHANICAL CHARACTERISTICS OF THE DC BRUSHLESS BLOWER. THE BLOWER MOTOR IS WITH ONE PHASE AND FOUR POLES.

2. CHARACTERS:

(CONDITION: 25°C, 5 VDC, 1 ATM)


ITEM	DESCRIPTION
RATED VOLTAGE	5 VDC
OPERATION VOLTAGE	2.5~5.5 VDC
MIN. START VOLTAGE	2.5 VDC MAX.
INPUT CURRENT	0.17 (MAX. 0.32) A (SAFETY CURRENT 0.32 A)
INPUT POWER	0.85 (MAX. 1.75) W
SPEED	3350 ±8% R.P.M.
MAX. AIR PRESSURE (AT ZERO AIRFLOW AND BYPASS IS SEALED)	7.462 (MIN. 5.320) mm-H 0
MAX. AIR FLOW @ RATED VOLTAGE. (AT ZERO STATIC PRESSURE IN MODULE)	@ OUTLET A (OUTLET B OPENED) 4.197 (MIN. 3.663) CFM @ OUTLET B (OUTLET A OPENED) 2.542 (MIN. 2.008) CFM
VIBRATION LEVEL	< 2.0 m/s ²
ACOUSTICAL NOISE (@50cm)	32.2 dBA (MAX. 35.0dBA)
INSULATION TYPE	UL: CLASS A
FAN TYPE	DISH FAN
ROTATION(TOP SIDE VIEW)	CLOCKWISE

Customer P/N:

Delta Model NO: KSB0505HA-G303

INSULATION STRENGTH	10 MEG OHM MIN. AT 500 VDC (BETWEEN FRAME AND (+) TERMINAL)
DIELECTRIC STRENGTH	5 mA MAX. AT 500 VAC 60 Hz 3 SECONDS, (BETWEEN FRAME AND (+) TERMINAL)
LIFE EXPECTANCE (L10) (AT LABEL VOLTAGE)	30,000 HOURS AT 50 °C WITH 15 ~ 65 %RH
OVER CURRENT SHUT DOWN	THE CURRENT WILL SHUT DOWN WHEN LOCKING ROTOR

- NOTES:
- ALL READINGS ARE MEASURED AFTER STABLY WARMING UP THROUGH 10 MINUTES.
 - STANDARD AIR PROPERTY IS AIR AT (Td) 25°C TEMPERATURE, (RH) 65% RELATIVE HUMIDITY, AND (Pb) 760 mmHg BAROMETRIC PRESSURE.
 - THE VALUES WRITTEN IN PARENS , (), ARE LIMITED SPEC.
 - ACOUSTICAL NOISE MEASURING CONDITION:

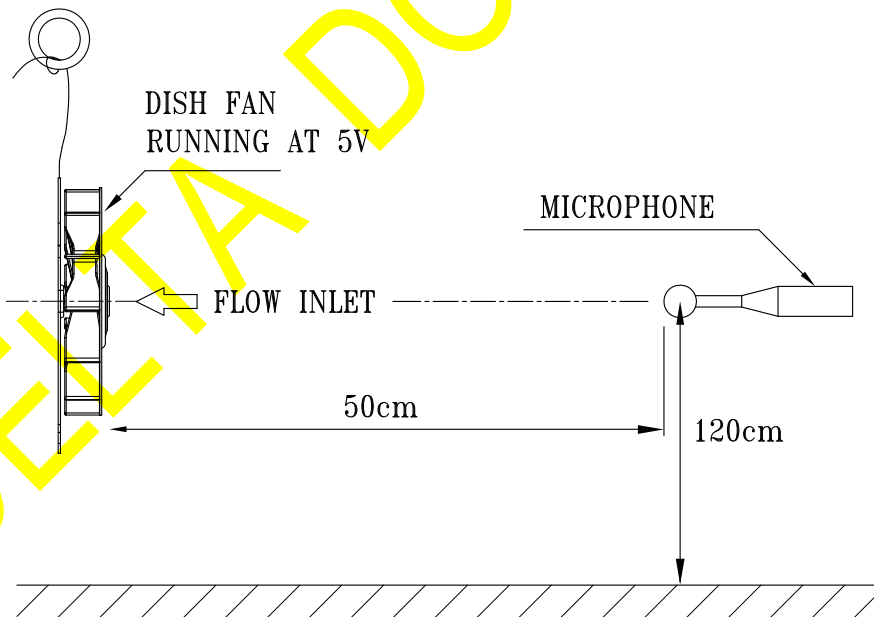


NOISE IS MEASURED AT RATED VOLTAGE IN FREE AIR OF SEMI-ANECHOIC CHAMBER WITH G.R.A.S. MICROPHONE AND SQAII ANALYSIS SYSTEM, AMBIENT NOISE SHALL BE LESS THAN 18dBA.


Customer P/N:

Delta Model NO: KSB0505HA-G303

d. P-Q TEST FIXTURE:

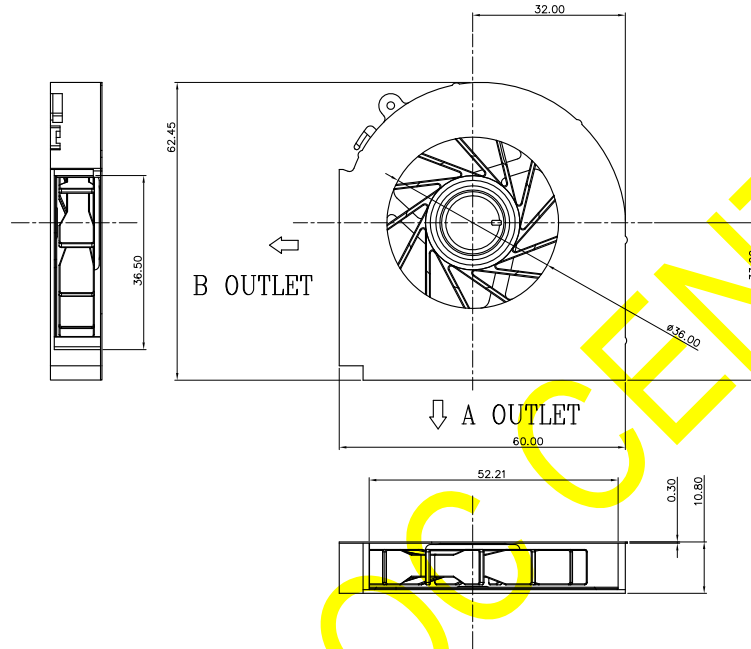

e. P-Q CURVE (TOTAL OUTLETS):

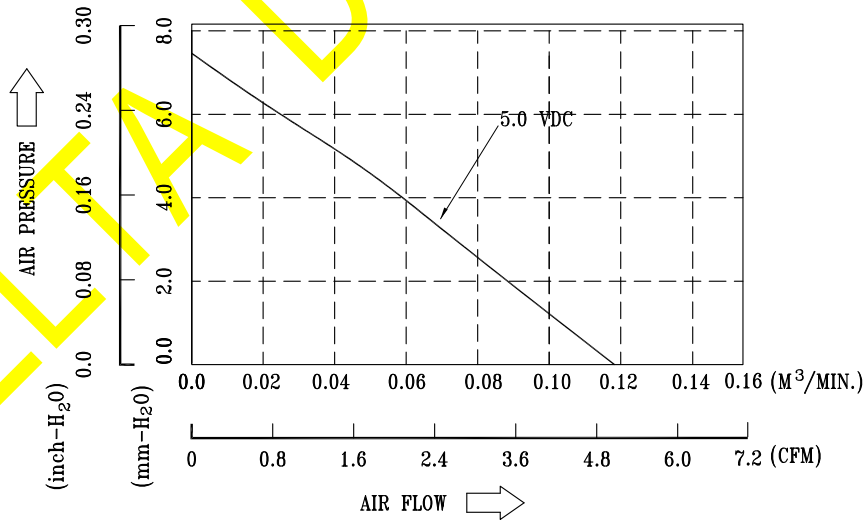

* TEST CONDITION: INPUT VOLTAGE ----- OPERATION VOLTAGE
TEMPERATURE ----- ROOM TEMPERATURE
HUMIDITY ----- 65%RH
TEST HOUSING-----SEE DIMENSIONS DRAWING

Customer P/N:

Delta Model NO: KSB0505HA-G303

3. MECHANICAL:

- 3-1. DIMENSIONS ----- REFER TO PAGE 7.
3-2. HOUSING ----- SECC
3-3. IMPELLER ----- PLASTIC UL: 94V-0
3-4. BEARING SYSTEM ----- SUPERFLOW
3-5. WEIGHT ----- 16.5±2.0g

4. ENVIRONMENTAL:

- 4-1. OPERATING TEMPERATURE ----- 0 TO +70 DEGREE C
4-2. STORAGE TEMPERATURE ----- -10 TO +75 DEGREE C
4-3. OPERATING HUMIDITY ----- 5 TO 90 % RH
4-4. STORAGE HUMIDITY ----- 5 TO 95 % RH

5. PROTECTION:

- 5-1 LOCKED ROTOR PROTECTION
IMPEDANCE OF MOTOR WINDING PROTECTS MOTOR FROM FIRE IN 96 HOURS OF LOCKED ROTOR CONDITION AT THE RATED VOLTAGE.
5-2. DROP TEST
IN MINIMUM PACKAGING CONDITION BLOWER WITHSTANDS EACH ONE DROP OF THREE FACES FROM 30 CM DISTANCE HEIGHT ONTO 10 MM THICKNESS OF WOODEN BOARD.

6. RE OZONE DEPLETING SUBSTANCES:

- 6-1. NO CONTAINING PBBs, PBBOs, CFCs, PBBEs, PBDPEs AND HCFCs.

7. LEAD-FREE DECLARATION:


- 7-1. THE FAN IS A LEAD-FREE PRODUCT.

Customer P/N:

Delta Model NO: KSB0505HA-G303

8. VIBRATION LEVEL CONDITION:

VIBRATION TEST AT 3800 RPM
FREQUENCY RANGE: 20Hz~100Hz.

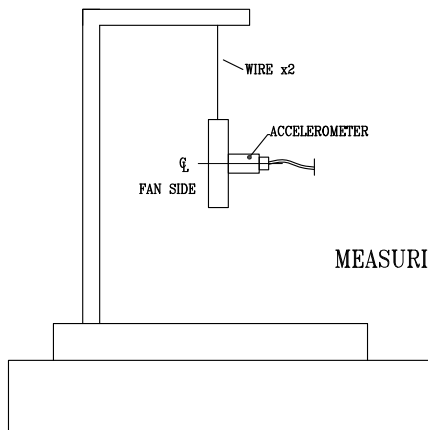

9. SAFETY NOTICE:

- 9-1. PLEASE DON'T USE THIS PRODUCT BEYOND THIS SPECIFICATION RANGE, IT MAY CAUSE PRODUCT'S BREAKDOWN.
- 9-2. BE CAREFUL WITH INSTALLING PRODUCT IN YOUR MACHINE, HIT, DROP, SHAKE MAY CAUSE PRODUCE'S MACHANISM PROBLEM.
- 9-3. MAKE SURE THAT V(+) AND GND ARE CONNECTED CORRECTLY, OTHERWISE FAN WILL NOT START UP.
- 9-4. TOUCH IMPELLER WHEN ROTATING WILL CAUSE INJURE OR FAN'S FAILURE, MAKE SURE FAN IS OPERATING AT AN ENVIRONMENT WITHOUT LOCKING POSSIBILITY.
- 9-5. AVOID PULLING CABLE WHEN HANDLING FANS, IT MAY CAUSE ELECTRIC FAILURE.

Customer P/N:

Delta Model NO: KSB0505HA-G303

10. BASIC RELIABILITY REQUIREMENT:

- 10-1. THERMAL SHOCK LOW TEMPERATURE: -40°C
HIGH TEMPERATURE: +85°C
SOAK TIME: 30 MINUTES
TRANSITION TIME < 5 MINUTES
DUTY CYCLES: 10
- 10-2. HUMIDITY EXPOSURE TEMPERATURE: +60°C
HUMIDITY: 90%-98% RH
POWER: 3PCS OPERATING
3PCS NON-OPERATING
TEST TIME: 240 HOURS
- 10-3. VIBRATION TEMPERATURE: +25°C
ORIENTATION: X, Y, Z
POWER: NON-OPERATING
VIBRATION LEVEL: OVERALL $g_{RMS}=3.2$
- | FREQUENCY(Hz) | PSD(G^2/Hz) |
|---------------|-----------------|
| 10 | 0.040 |
| 20 | 0.100 |
| 40 | 0.100 |
| 800 | 0.002 |
| 1000 | 0.002 |
- TEST TIME: 2 HOURS ON EACH ORIENTATION

- 10-4. MECHANICAL SHOCK TEMPERATURE: +25°C
ORIENTATION: X, Y, Z
POWER: NON-OPERATING
ACCELERATION: 50 G MIN.
PULSE: 11 ms HALF-SINE WAVE
NUMBER OF SHOCKS: 3 SHOCKS FOR EACH DIRECTION
- TESTING RESULT: THERE IS NO FAN FAILED OR OUT OF CHARACTERS OF ITEM 2. AFTER RELIABILITY TESTING.

11. LIFE EXPECTANCE ACCELERATING HIGH TEMPERATURE TEST:
FAN QUANTITY: 56 PCS.
CONDITION: OPERATION AT +70°C WITH 7% RH.
DURATION: 2000 HOURS MIN.

TESTING RESULT:


FAN PERMISSION CRITERIA FOR THE MEASUREMENT AFTER TEST:


1. SPEED CANNOT DROP OF $\geq 15\%$ BELOW THE ORIGINAL MEASURED rpm.
2. CURRENT CANNOT INCREASE $> 15\%$ OF ORIGINAL MEASURED CURRENT.
3. NOISE CANNOT > 3 dB(A) OVER THE ORIGINAL MEASURED NOISE.
4. NO MECHANICAL AND ELECTRICAL DAMAGE.

Customer P/N:

Delta Model NO: KSB0505HA-G303

12. DIMENSION:
A. FAN FIGURE:

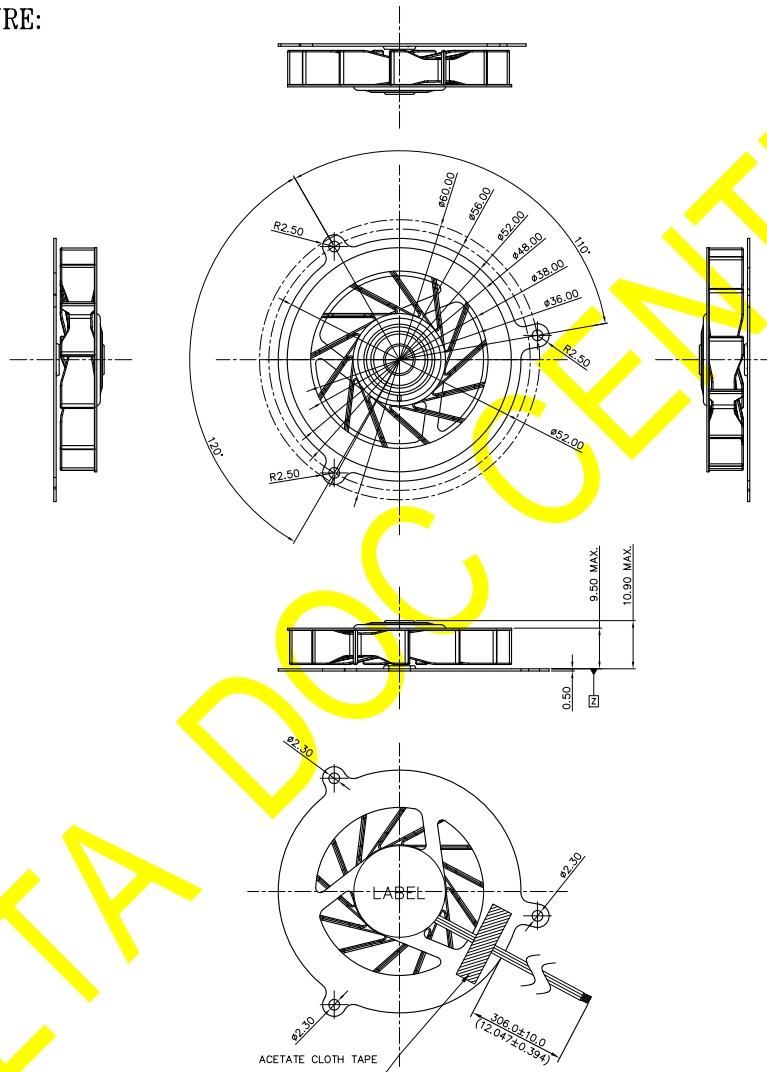

TOLERANCES		LEAD WIRE UL:1571 AWG#28	
HOLES : ± 0.15	ANGLES : $\pm 2.0^\circ$	RED WIRE ----(+)	
<1.0 : ± 0.10	 THIRD ANGLE PROJECTION	BLACK WIRE ----(-)	
1.0~10 : ± 0.20		BIUE WIRE ---- (F00)	
10~50 : ± 0.30			
ABOVE 50 : ± 0.40			
SCALE	---	UNIT	mm

Customer P/N:

Delta Model NO: KSB0505HA-G303

B. LABEL TYPE AND DATE CODE DEFINITION:



1. DATE CODE NUMBER REFER TO BELOW LIST:

THE FORMAT FOR THE 6 DIGIT DATE CODE		
Y	YEAR	"0" 2010, "1" FOR 2011, ET AL.
M	MONTH	1-9 IS JAN-SEPT, X IS OCT, Y IS NOV, Z IS DEC
DD	DATE	01-31 MEANS DATE OF MONTH
XX	PRODUCTION LINE	"F1" MEANS NO.F1 PRODUCTION LINE, "F2" MEANS NO.F2 PRODUCTION LINE, ET AL.
R	RoHS	"R" MEANS THE FAN CONFORM TO RoHS COMPLIANCE.

2. PRODUCTION LOCATION

"MADE IN CHINA" MEANS "MADE IN CHINA(DONGGUAN)";


"MADE IN CHINA(WF)" MEANS "MADE IN CHINA(WUJIANG)".

Customer P/N:

Delta Model NO: KSB0505HA-G303

13. FREQUENCY GENERATOR (FG) SIGNAL:

13-1. OUTPUT CIRCUIT - OPEN COLLECTOR MODE:

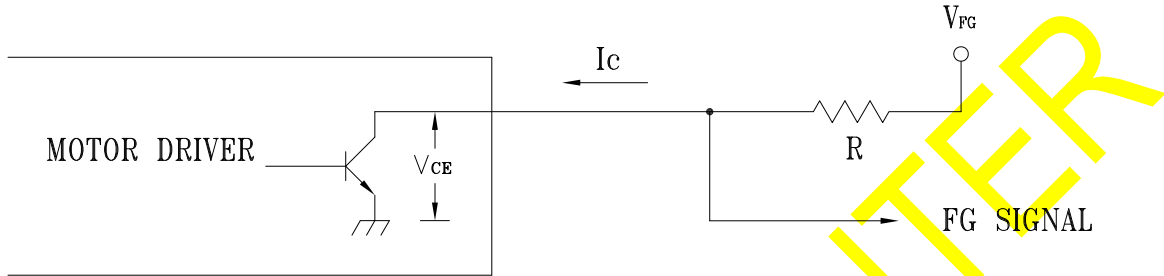

CAUTION:

THE LEAD WIRE OF FG SIGNAL CAN NOT TOUCH THE LEAD WIRE OF POSITIVE OR NEGATIVE.

13-2. SPECIFICATION:


$V_{ce} (sat) = 0.5V \text{ MAX.}$

$V_{FG} = 5.5VDC \text{ MAX.}$


$I_c = 5mA \text{ MAX.}$

$R \geq V_{FG} / I_c$

13-3. FREQUENCY GENERATOR WAVEFORM:

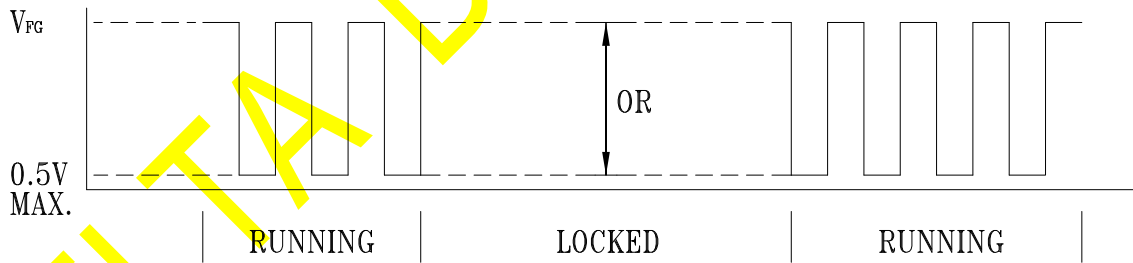

FAN RUNNING FOR 4 POLES



$T1 = T2 = T3 = T4 = 1/4 \text{ TS}$

$N = \text{R.P.M}$

$TS = 60/N(\text{SEC})$

BLADE LOCKED

OR



Application Notice

- 1. Delta will not guarantee the performance of the products if the application condition falls outside the parameters set forth in the specification.**
- 2. A written request should be submitted to Delta prior to approval if deviation from this specification is required.**
- 3. Please exercise caution when handling fans. Damage may be caused when pressure is applied to the impeller, if the fans are handled by the lead wires, or if the fan was hard-dropped to the production floor.**
- 4. Except as pertains to some special designs, there is no guarantee that the products will be free from any such safety problems or failures as caused by the introduction of powder, droplets of water or encroachment of insect into the hub.**
- 5. The above-mentioned conditions are representative of some unique examples and viewed as the first point of reference prior to all other information.**
- 6. It is very important to establish the correct polarity before connecting the fan to the power source. Positive (+) and Negative (-). Damage may be caused to the fans if connection is with reverse polarity, if there is no foolproof method to protect against such error specifically mentioned in this spec.**
- 7. Delta fans without special protection are not suitable where any corrosive fluids are introduced to their environment.**
- 8. Please ensure all fans are stored according to the storage temperature limits specified. Do not store fans in a high humidity environment. We highly recommend performance testing is conducted before shipping, if the fans have been stored over 6 months.**
- 9. Not all fans are provided with the Lock Rotor Protection feature. If you impair the rotation of the impeller for the fans that do not have this function, the performance of those fans will lead to failure.**
- 10. Please be cautious when mounting the fan. Incorrect mounting of fans may cause excess resonance, vibration and subsequent noise.**
- 11. It is important to consider safety when testing the fans. A suitable fan guard should be fitted to the fan to guard against any potential for personal injury.**
- 12. Except where specifically stated, all tests are carried out at room (ambient) temperature and relative humidity conditions of 25°C, 65% RH. The test value is only for fan performance itself.**
- 13. Be certain to connect an “ 4.7µF or greater” capacitor to the fan externally when the application calls for using multiple fans in parallel, to avoid any unstable power.**



UL International, L.L.C.
Taiwan Branch

美商優力安全認證有限公司台灣分公司

UL International, L.L.C., Taiwan Branch

台北市 112 北投區大業路 260 號 1 樓

1st Fl 260 Da-Yeh Road Peitou Taipei City Taiwan 112

電話: 886-2-2896-7790

傳真: 886-2-2891-7644

<http://www.ul.com.tw>

NOTICE OF AUTHORIZATION TO APPLY THE UL MARK

August 7, 2006

Ms. Celine Liao
Delta Electronics Inc.
31-1 Shien Pan Rd.
Kuei San Industrial Zone
Taoyuan Hsien, 33370
Taiwan

Fax: 886-3-359-1991

E-mail: celine.liao@delta.com.tw

Reference: File E132003 Project 06CA37797

Products: USR - UL Investigation: DC Component Fans, Models KSB0505HA(Y) series, where (Y) may be xxxxx, where x may be A through Z, 0 through 9, "-" or blank.

Dear Ms. Liao,

Any information and documentation provided to you involving UL Mark services are provided on behalf of Underwriters Laboratories Inc.

UL's investigation of your products has been completed under the above project number and the subject products were determined to comply with the applicable requirements.

This letter temporarily supplements the UL Follow-Up Services Procedure and serves as authorization to apply the UL Recognized Marking and/or Recognized Component Mark only at the factory under UL's Follow-Up Service Program to the subject products, which are constructed as described below:

Identical to the subject models, which were submitted to UL for this investigation. The UL Records covering the products will be in the Follow-Up Services Procedure, File E132003, Volume 1.

To provide the manufacturer with the intended authorization to use the UL Marks, the addressee must send a copy of this Notice and all attached material to each manufacturing location as currently authorized in File E132003, Volume 1.

This authorization is effective from the date of this Notice and only for products at the indicated manufacturing locations. Records in the Follow-Up Services Procedure covering the products are now being prepared and will be sent to the indicated manufacturing locations in the near future. Please note that Follow-Up Services Procedures are sent to the manufacturers only unless the Applicant specifically requests this document.

Products that bear the UL Mark shall be identical to those that were evaluated by UL and found to comply with UL's requirements. If changes in construction are discovered, appropriate action will be taken for products not in conformance with UL's requirements and continued use of the UL Mark may be withdrawn.

Sincerely,

Anson Wang
Engineer
UL International, L.L.C., Taiwan Branch
Tel: 886-2-2896-7790, Ext. 62102
Fax: 886-2-2890-7441
E-mail: Anson.Wang@tw.ul.com

Reviewed by:

Jack Chang
Project Engineer
UL International, L.L.C., Taiwan Branch
E-mail: Jack.Chang@tw.ul.com



Statement of Compliance

Report No.: LR 91949C-317
Project No: LR 91949C-317
Date: July.21, 2006

Issued from: Delta Electronics, Inc.

Address: No. 31-1, Shien Pam Road, Kuei Shan Ind. Zone, Taoyuan, Taiwan, R.O.C.

Subject: Components DC Fan KSB0505HA

(Optional suffixes A-Z, 0-9, & blank may be added)

The subject equipment has been evaluated in accordance with CSA's Category Certification program and has been found to comply with the following requirements.

C22.2 No. 0-M91 – General Requirements – Canadian Electrical Code, Part II
CSA Standard C22.2 No. 113-M1984 – Fan and Ventilators
Technical Information Letter G-37C

By the authority of CSA, this equipment is immediately to bear the CSA mark.

In accordance with the Category Certification Procedure, the evaluation and testing of this equipment is subject to final validation by CSA.

Issued by

Celine Liao

Celine Liao
Safety Engineer
CPBG QE

cc: CSA Pacific/Central/Eastern Region Office

VDE Prüf- und Zertifizierungsinstitut Gutachten mit Fertigungsüberwachung

Ausweis-Nr. / Blatt /
Certificate No. / page
40016423 3

Name und Sitz des Genehmigungs-Inhabers / Name and registered seat of the Certificate holder
Delta Electronics Inc., 186 Ruey Kuang Road, NEIHU TAIPEI (114), TAIWAN

Aktenzeichen / File ref.
1164100-2611-0011 / 83134 / FG13 / BWL

letzte Änderung / updated Datum / Date
2006-12-14 2006-01-09

Dieses Blatt gilt nur in Verbindung mit Blatt 1 des Gutachtens mit Fertigungsüberwachung Nr. 40016423.
This supplement is only valid in conjunction with page 1 of the Certificate of Conformity with factory surveillance No. 40016423.

NFB0712LD/MD/HD/HHD/VHD	DC 12V (Appendix No.34)
EFC1548DG-5K06	DC 48V (Appendix No.35)
BDB05405HB	DC 5V (Appendix No.36)
NUB0712M	DC 12V (Appendix No.37)
NFB0712M-SM	DC 12V (Appendix No.37)
BFB0612HB-SM [new version]	DC 12V (Appendix No.38)
BFB0712HHD-SM06	DC 12V (Appendix No.39)
BFB0812H-SM05	DC 12V (Appendix No.40)
AFB0812SHE/EHE/GHE	DC 12V (Appendix No.41)
AFC0812DE	DC 12V (Appendix No.41)
AFB0824SHE/EHE/GHE	DC 24V (Appendix No.41)
KSB0505HA	DC 5V (Appendix No.42)
KHB2548HHU	DC 48V (Appendix No.43)
BFB04505L/M/H/HHA-A	DC 5V (Appendix No.43)
BFB0505L/M/H/HHA-A	DC 5V (Appendix No.43)
KHB2348HHU	DC 48V (Appendix No.44)
KHB2348HHV	DC 48V (Appendix No.44)
KFB0505HA	DC 5V (Appendix No.45)
DSB0612LB/MB/HB/HHB	DC 12V (Appendix No.46)
PFC1212DE-6C1M	DC 12V (Appendix No.47)
QFR1224EHE/GHE	DC 24V (Appendix No.48)
QFR1248EHE/GHE	DC 48V (Appendix No.48)
KSB0405HA	DC 5V (Appendix No.49)
AFC0712DE-5J76 (D27550-001)	DC 12V (Appendix No.50)
NFB1212L/M/H	DC 12V (Appendix No.51)
BSB0412HA-SM02	DC 12V (Appendix No.52)
AFB0648VH-5C2C	DC 48V (Appendix No.53)
BFB0305L/M/H/HHA-A	DC 5V (Appendix No.54)
BFB03505L/M/H/HHA-A	DC 5V (Appendix No.55)
BFB0405L/M/H/HHA-A	DC 5V (Appendix No.56)
BSB0712HD	DC 12V (Appendix No.57)
AFB08512LD/MD/HD/HHD/VHD	DC 12V (Appendix No.58)
AFC08512DD	DC 12V (Appendix No.58)
BUB0524MB/HB/HHB	DC 24V (Appendix No.59)
QFR0924EHE/GHE/UHE	DC 24V (Appendix No.60)
QFR0948EHE/GHE/UHE	DC 48V (Appendix No.60)
BFB0712L-A/M-A/H-A/HH-A	DC 12V (Appendix No.61)
ASB03505LB-6C18	DC 5V (Appendix No.62)
PFC1548DG	DC 48V (Appendix No.63)
FFB0412VHN-A/SHN-A	DC 12V (Appendix No.64)
AFB1212LE/ME/HE/HHE/VHE [new version]	DC 12V (Appendix No.65)

Fortsetzung siehe Blatt 4 /
continued on page 4

