
VELCRO® brand

Knits



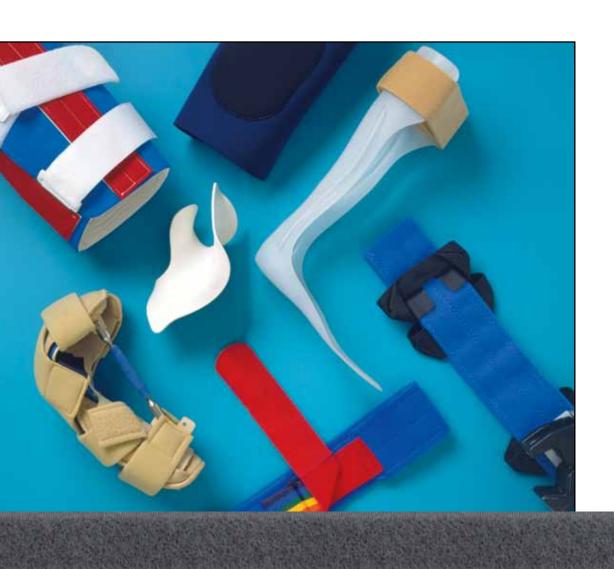

VELCRO® brand

Knits

VELCRO® brand knits have been designed for use in a wide range of applications from disposable products to high strength fabricated straps. Our knits are compatible with hooks from our VELCRO® brand line as well as plastic hooks from our ULTRA-MATE® HTH family.

Performance Overview



Applications



Medical

- Surgical Gowns and Drapes
- Diagnostic Devices
- Vascular Equipment



Outdoor Recreation

- Tenting and Shelters
- Sport Helmets
- Outdoor Apparel



Orthopedics

- Knee and leg immobilizers
- Hand, arm, and wrist bracing
- Sport bracing

Product Line Details

Knit 3001

This heavy weight, circular knit has a napped finish and medium to high cycle life. Available up to 54" wide, knit 3001 is great for applications requiring performance and durability similar to woven loop 1000.

Construction: Nylon Peel: 1.6 PIW Shear: 14.0 PSI

Knit 3003

This medium weight circular knit has a napped finish and moderate cycle life.

Designed as an economical alternative to knit 3001, knit 3003 is available in up to 57" wide.

Construction: Nylon Peel: .8 PIW Shear: 11.2 PSI

Knit 3610

This medium weight, warp knit with a moderate to low cycle life is available in up to 50" wide. Knit 3610 has a low profile and soft hand.

Construction: Nylon Peel: .55 PIW Shear: 9.2 PSI

Knit 3008

This medium weight, warp knit with a moderate to low cycle life is available up to 57" wide. Loop 3008 has a plush, low profile and soft hand.

Construction: Nylon Peel: .9 PIW Shear: 14.0 PSI

Knit 3905

This light weight, warp knit with a low cycle life is available up to 58" wide. Knit 3905 has a very low profile and is ideal for disposable applications.

Construction: Nylon Peel: .35 PIW Shear: 7.5 PSI

Knit 3200

This light weight, warp knit with a low cycle life is available up to 54" wide. Knit 3200 has a medium profile and open weave. It is ideal for disposable applications.

Construction: Polyester Peel: .75 PIW Shear: 18.0 PSI

Please note that all strength values reflect the closure system's typical value when tested with VELCRO® brand Hook 88, except for Knit 3200. Knit 3200 tested with ULTRA-MATE® HTH 711. For additional technical details, please contact us.

Sample

Sample

Sample

Sample

Sample

Sample

Sample



The Velcro Companies are worldwide leaders in fastening systems offering a wide range of solutions from standard hook and loop to fully finished and fabricated products. With 50 years and counting of experience and over 300 active patents, we are able to offer innovative solutions that satisfy our customers' needs.



North American Headquarters

United States

Velcro USA Inc. 406 Brown Avenue Manchester, NH 03103 Tel: (800) 225-0180

Fax: (800) 835-2761 marketing@velcro.com

Canada

Velcro Canada Inc. 114 East Drive Brampton, Ontario Canada L6T 1C1 Tel: (905) 791-1630 Fax: (905) 791-5329

canada@velcro.com

Mexico

Velcro de Mexico, S.A. de C.V. Ave. Industria No. 102 Nave IV-A Col. Los Reyes Pueblo Tlalnepantla de Baz Edo. De Mexico C.P. 54090 Tel: 011-52-55-5005-3300 Fax: 011-52-55-5384-5413 alandero@velcro.com

WORLDWIDE LOCATIONS

