
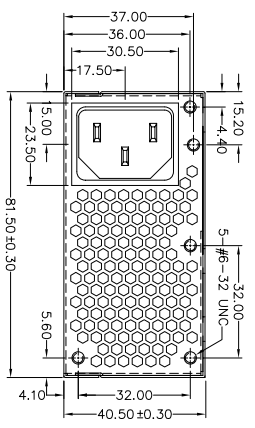


NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 產地標籤依業務指示加貼.
3. PE+12V請插PCB+12V1孔，其餘插+12V2孔

UNIT:mm

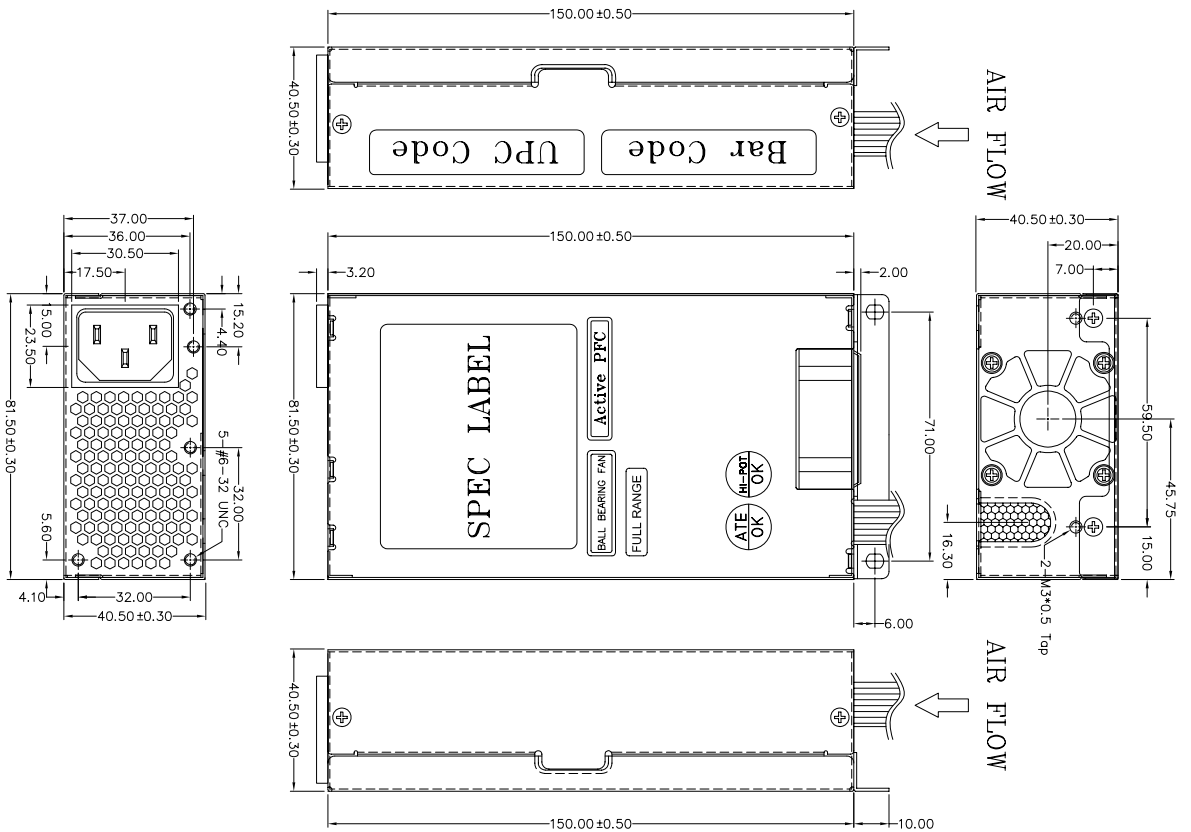

REF. ID.	NO.	SIGNAL	WIRE COLOR	Gauge	CONNECTOR TYPE	LENGTH
1	1	+3.3V	ORANGE	20	J1T	200±15
2	2	+3.3V	ORANGE	20	C4020R102	200±15
3	3	COM	BLACK	20	-A20P+	
4	4	+5V	RED	20	C4020R102	
5	5	COM	BLACK	20	-A4P+	
6	6	+5V	RED	20	OR EQUIV	
7	7	COM	BLACK	20		
8	8	PW-OK	GRAY	24		
9	9	+5Vsb	PURPLE	20		
10	10	+12V	YELLOW	20		
11	11	+12V	YELLOW	20		
12	12	+3.3V	ORANGE	20		
13	13	+3.3Vb	BROWN	24		
14	14	-12V	BLUE	24		
15	15	COM	BLACK	20		
16	16	P5-ON	GREEN	24		
17	17	COM	BLACK	20		
18	18	COM	BLACK	20		
19	19	COM	BLACK	20		
20	20	COM	BLACK	20		
21	21	+6V	RED	20		
22	22	+6V	RED	20		
23	23	+6V	RED	20		
24	24	COM	BLACK	20		
PA	1	+12V	YELLOW	20	AMP	250±15
PA	2	COM	BLACK	20	-40024-4mm or 24V.	
PA	3	COM	BLACK	20		
PA	4	+5V	RED	20		
PC	1	+12V	YELLOW	20	AMP	310±15
PC	2	COM	BLACK	20	-40024-4mm or 24V.	
PC	3	COM	BLACK	20		
PC	4	+5V	RED	20		
PB	1	+12V	YELLOW	20	AMP	150±10
PB	2	COM	BLACK	20	171822-4mm or EQUIV.	
PB	3	COM	BLACK	20		
PB	4	+5V	RED	20		
PD	1	+12V	YELLOW	20	AMP	150±10
PD	2	COM	BLACK	20	-40024-4mm or 24V.	
PD	3	COM	BLACK	20		
PD	4	+5V	RED	20		
PE	1	COM	BLACK	20	1002X	310±15
PE	2	COM	BLACK	20	50521-2040	310±15
PE	3	+12V	YELLOW	20	2040	310±15
PE	4	+12V	YELLOW	20	or EQUIV.	310±15
PF	1	+12V	YELLOW	20	C1271H80	310±15
PF	2	COM	BLACK	20	-1P	310±15
PF	3	+5V	RED	20	or EQUIV.	310±15
PF	4	COM	BLACK	20		310±15
PG	1	+12V	YELLOW	20	C1270H80	150±10
PG	2	COM	BLACK	20	-1P	150±10
PG	3	+5V	RED	20	or EQUIV.	150±10
PG	4	COM	BLACK	20		150±10
PG	5	+3.3V	ORANGE	20		150±10

FSP P/N.:9PA1503411
SPI P/N.:SPI150FA

MODEL NO. : SPI150FA(S03001)	TITLE: ASSY	SHEET: 1 OF 1	REV:01
R&D(2)	PE	DRAWN	DATE
INTERIOR COUNTERSIGN:		樂家龍	Jul.17.2008

Mechanical Drawing(外觀/機體圖)表單編號7000P-0111