
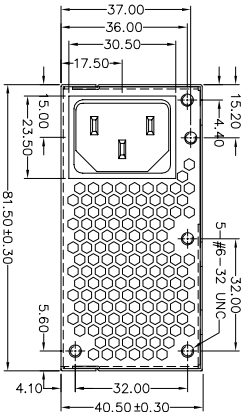


NOTE: 增加支架牙孔

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 產地標籤依業務指示加貼.

UNIT:mm

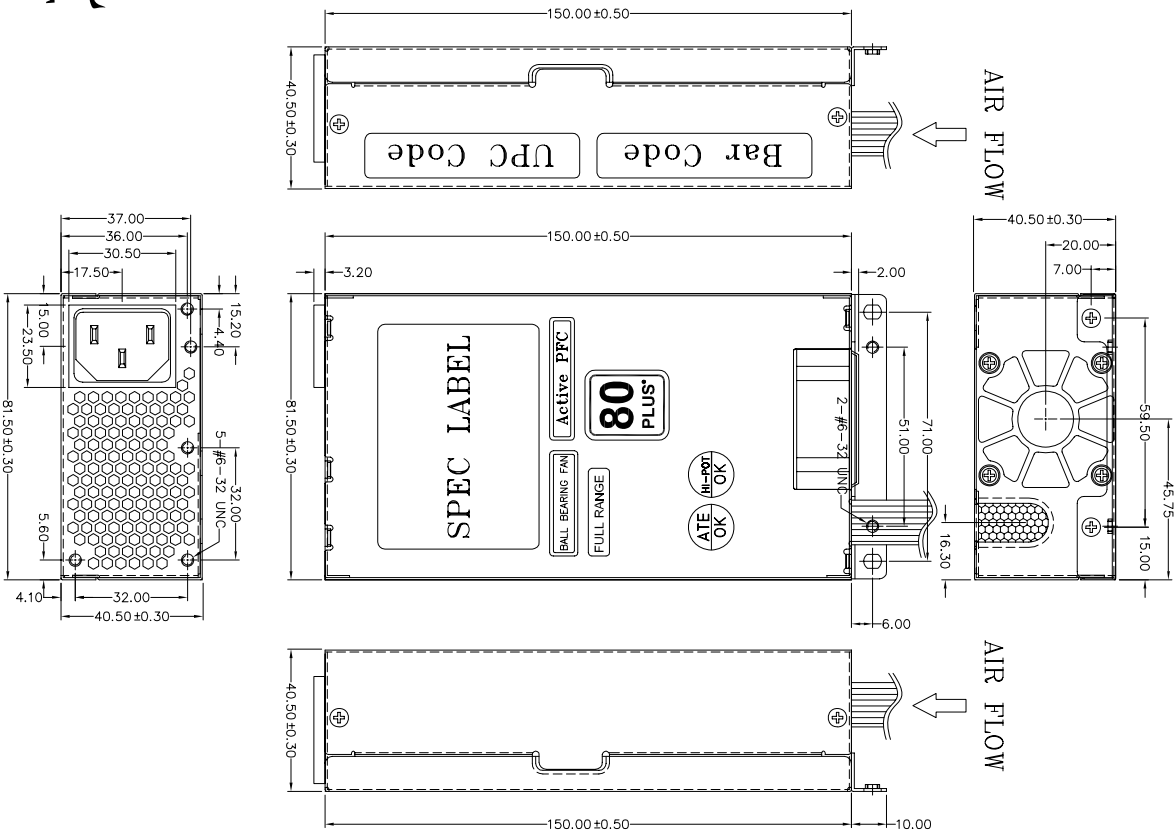

REF. D.	REF. NO.	SIGNAL	WIRE COLOR	GUAGE	CONNECTOR TYPE	LENGTH
1		+3.3V	ORANGE	20	MT	200±15
2		+3.3V	ORANGE	20	C482/202	mm
3		COM	BLACK	20	-482P+	
4		+5V	RED	20	C482/202	
5		COM	BLACK	20	-482P+	
6		+5V	RED	20	OR EQUIV	
7		COM	BLACK	20		
8		PW-OK	GRAY	24		
9		+5Vsb	PURPLE	20		
10		+12V2	YELLOW	20		
11		+12V2	YELLOW	20		
12		+3.3V	ORANGE	20		
13		+3.3V	BROWN	24		
14		-12V	BLUE	24		
15		COM	BLACK	20		
16		P5-ON	GREEN	24		
17		COM	BLACK	20		
18		COM	BLACK	20		
19		COM	BLACK	20		
20						
21		+5V	RED	20		
22		+5V	RED	20		
23		+5V	RED	20		
24		COM	BLACK	20		
1		+12V2	YELLOW	20	AMP 250±15	AMP 1.48±0.5mm or EQUIV.
2		COM	BLACK	20		
3		COM	BLACK	20		
4		+5V	RED	20		
1		+12V2	YELLOW	20	AMP 310±15	AMP 1.48±0.5mm or EQUIV.
2		COM	BLACK	20		
3		COM	BLACK	20		
4		+5V	RED	20		
1		+12V2	YELLOW	20	AMP 150±10	AMP 1.71±0.2-4mm or EQUIV.
2		COM	BLACK	20		
3		COM	BLACK	20		
4		+5V	RED	20		
1		+12V2	YELLOW	20	AMP 150±10	AMP 1.48±0.5mm or EQUIV.
2		COM	BLACK	20		
3		COM	BLACK	20		
4		+5V	RED	20		
1		+12V2	YELLOW	20	AMP 310±15	AMP 1.71±0.2-4mm or EQUIV.
2		COM	BLACK	20		
3		+12V1	Yel/Blk	20		
4		+12V1	Yel/Blk	20		
1		+12V2	YELLOW	20	AMP 310±15	AMP 1.71±0.2-4mm or EQUIV.
2		COM	BLACK	20		
3		+5V	RED	20		
4		COM	BLACK	20		
5		+3.3V	ORANGE	20		
1		+12V2	YELLOW	20	C42P/180	150±10
2		COM	BLACK	20	-18P	
3		+5V	RED	20	OR EQUIV.	
4		COM	BLACK	20		
5		+3.3V	ORANGE	20		

FSP P/N.:9PA2700702  
SPI P/N.:SPI270LE

MODEL NO. : SPI270LE(S03002)	TITLE: ASSY	SHEET: 1 OF 1	REV:04
R&D(2)	PE	DRAWN	DATE
INTERIOR COUNTERSIGN:		樂家龍	Sep.09.2008