



全漢企業股份有限公司

SPI Electronic Co., Ltd.

台灣桃園市建國東路 22 號
TEL : 886-3-375-9888
<http://www.fsp-group.com.tw>






No. 22, Jianguo E. Rd., Taoyuan City,
Taiwan, R.O.C.
FAX : 886-3-375-6966
Email:sales@mail.fsp-group.com.tw

MECHANICAL DRAWING



Released Date:2007/3/6-17:28:6

REF. ID.	PN	SIGNAL	WIRE COLOR	GUAGE	CONNECTOR TYPE	CABLE LENGTH
P1	1	+3.3VDC	ORANGE	18	AMP	500±30mm
	2	+3.3VDC	ORANGE	18	AMP	500±30mm
	3	COM	BLACK	18	AMP	-10
	4	+5VDC	RED	18	AMP	
	5	COM	BLACK	18	AMP	
	6	+5VDC	RED	18	AMP	
	7	COM	BLACK	18	AMP	
	8	PM-OK	GRAY	24	AMP	
	9	+5Vsb	PURPLE	18	AMP	
	10	+12VDC	YELLOW	18	AMP	
	11	+12VDC	YELLOW	18	AMP	
	12	+3.3VDC	ORANGE	18	AMP	
	13	+3.3VDC	ORANGE	18	AMP	
	14	+5VDC	BROWN	24	AMP	
	15	COM	BLACK	18	AMP	
	16	PS-ON	GREEN	24	AMP	
	17	COM	BLACK	18	AMP	
	18	COM	BLACK	18	AMP	
	19	COM	BLACK	18	AMP	
	20					
	21	+5VDC	RED	18	AMP	
	22	+5VDC	RED	18	AMP	
23	+5VDC	RED	18	AMP		
24	COM	BLACK	18	AMP		
PA	1	+12V	YELLOW	18	AMP	-480424-0390±30mm
	2	COM	BLACK	18	AMP	-10
	3	COM	BLACK	18	AMP	or EQV.
	4	+5V	RED	18	AMP	
PB	1	+12V	YELLOW	18	AMP	-480424-0155±10mm
	2	COM	BLACK	18	AMP	or EQV.
	3	COM	BLACK	18	AMP	
	4	+5V	RED	18	AMP	
PC	1	+12V	YELLOW	18	AMP	390±30mm
	2	COM	BLACK	18	AMP	-10
	3	+5V	RED	18	AMP	
	4	COM	BLACK	18	AMP	
PD	1	+3.3VDC	ORANGE	18	AMP	
	2	COM	BLACK	18	AMP	
	3	+12V	YELLOW/BLK	18	AMP	
	4	+12V	YELLOW	18	AMP	
PE	1	COM	BLACK	18	AMP	-480424-0390±30mm
	2	COM	BLACK	18	AMP	-10
	3	COM	BLACK	18	AMP	or EQV.
	4	+5V	RED	18	AMP	
PF	1	+12V	YELLOW	18	AMP	-480424-0155±10mm
	2	COM	BLACK	18	AMP	or EQV.
	3	COM	BLACK	18	AMP	
	4	+5V	RED	18	AMP	
PG	1	+5V	RED	18	AMP	171822-4
	2	COM	BLACK	22	AMP	155±10mm
	3	COM	BLACK	22	AMP	
	4	+5V	RED	22	AMP	

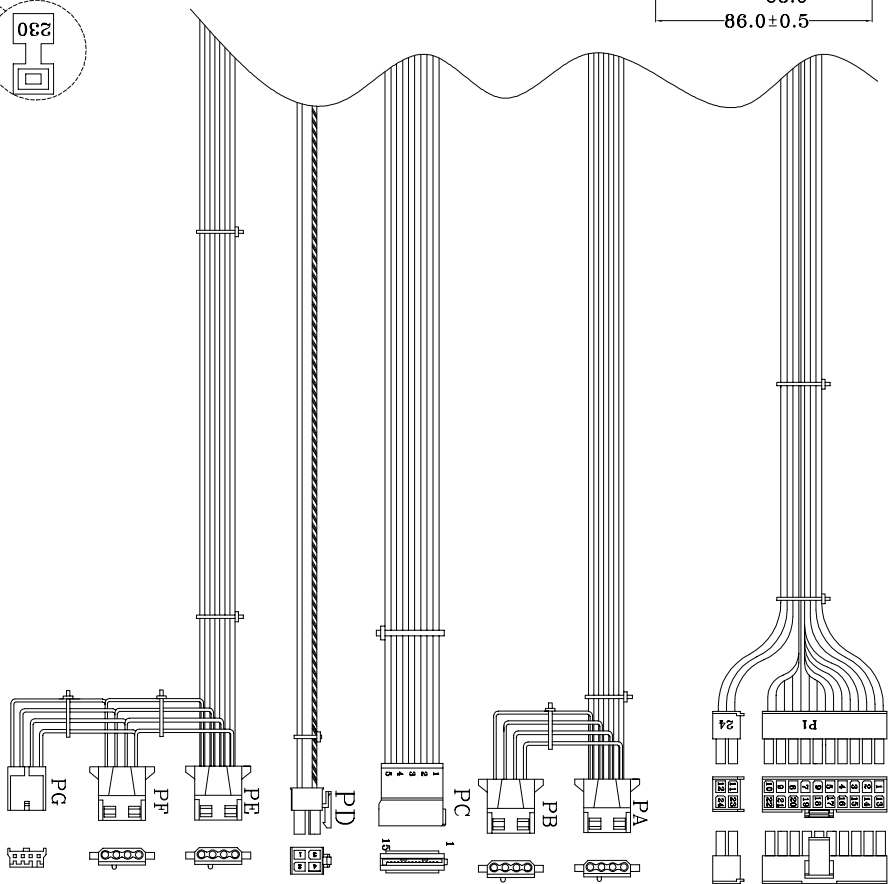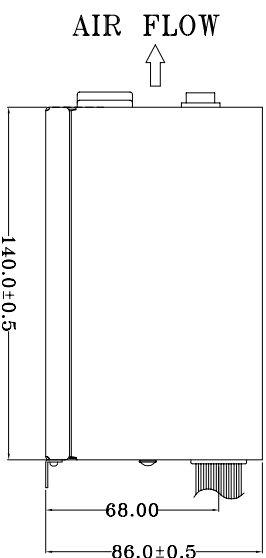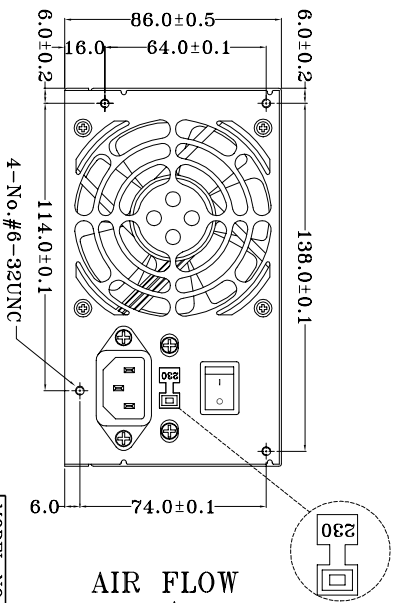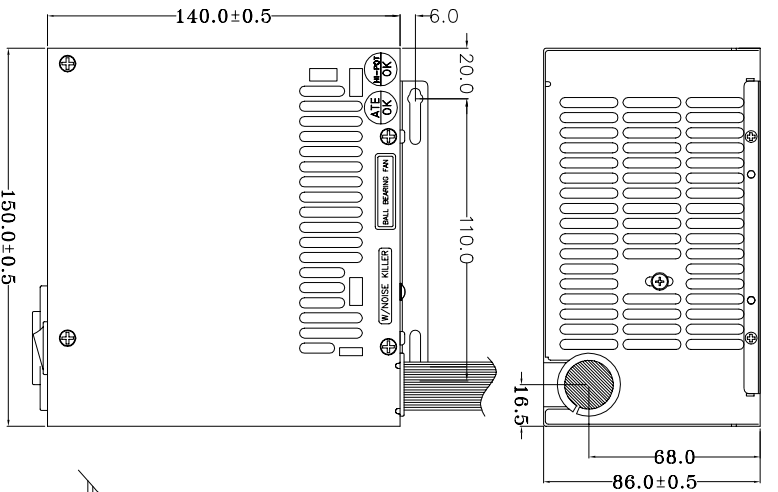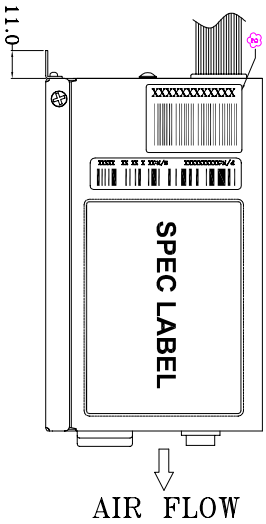

UNIT:mm

- NOTE:
1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. 產地標籤依業務指示加貼:

MODEL NO:	FSP300-60THA(F06001)	TITLE:	ASSY
APPROVE:	PE	DRAWN:	
INTERIOR COUNTERSIGN:		DATE:	MAR. 06. 2007

P/N.:9PA3007715

SHEET: 1 OF 1 REV:02

Mechanical Drawing(外觀/機體圖)表單編號7000P-0111