



1 I/O插在POWER CABLE上

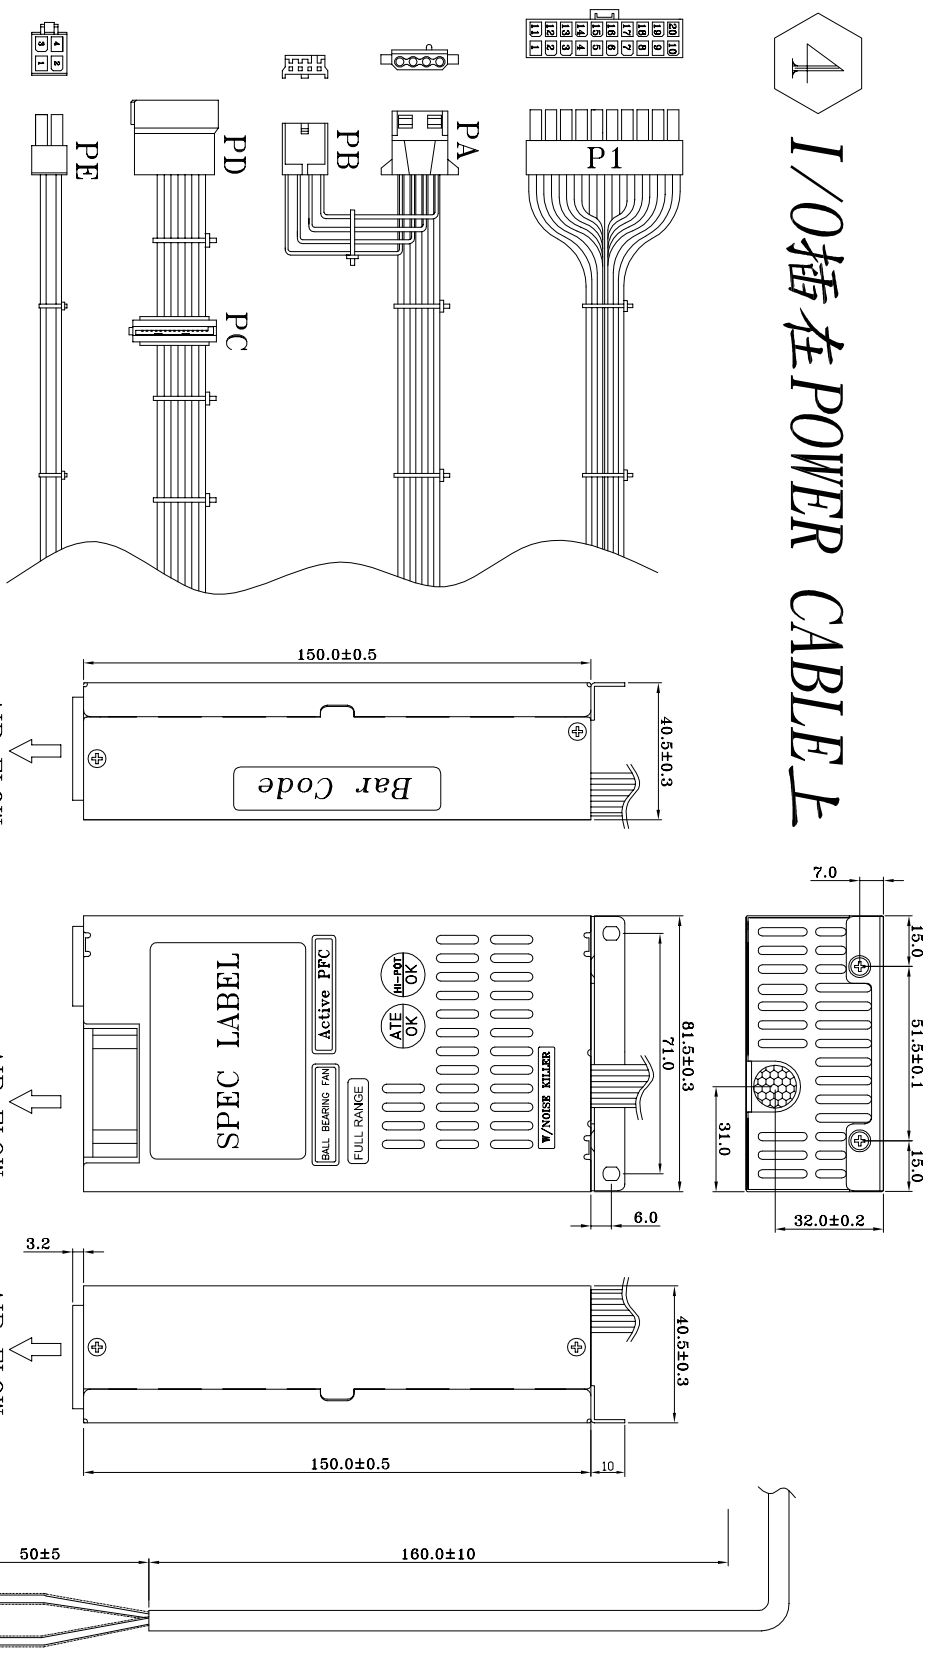

REF. D.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	LENGTH
P1	1	+3.3V	ORANGE	18	MOLEX 600±15 39-01- 2200 or EQUIV.	600±15 mm
	2	+3.3V	ORANGE	18		
	3	COM	BLACK	18		
	4	+5V	RED	18		
	5	COM	BLACK	18		
	6	+5V	RED	18		
	7	COM	BLACK	18		
	8	PW-OK	GRAY	22		
	9	+5Vsb	PURPLE	18		
	10	+12V	YELLOW	18		
	11	+3.3V	ORANGE	18		
	12	+3.3Vs	BROWN	22		
	13	-12V	BLUE	22		
	14	COM	BLACK	18		
	15	PS-ON	GREEN	22		
	16	COM	BLACK	18		
	17	COM	BLACK	18		
	18	COM	BLACK	18		
	19	+5V	RED	18		
	20	+5V	RED	18		
PA	1	+12V	YELLOW	18	AMP 550±15 -480±24-0 mm or EQUIV.	300±10 mm
	2	COM	BLACK	18		
	3	COM	BLACK	18		
	4	+5V	RED	18		
PB	1	+12V	YELLOW	22	AMP 171822-4 or EQUIV.	300±10 mm
	2	COM	BLACK	22		
	3	COM	BLACK	22		
PC	1	+12V	YELLOW	18	CL271H80 -15P or EQUIV.	550±15 mm
	2	COM	BLACK	18		
	3	+5V	RED	18		
	4	COM	BLACK	18		
PD	1	+12V	YELLOW	18	CL270H00 -15P or EQUIV.	155±10 mm
	2	COM	BLACK	18		
	3	+5V	RED	18		
	4	COM	BLACK	18		
	5	COM	BLACK	18		
PE	1	COM	BLACK	18	MOLEX 700±20 39-01- 2040 or EQUIV.	700±20 mm
	2	COM	BLACK	18		
	3	+12V	YELLOW	18		
	4	+12V	YELLOW	18		

NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 產地標籤依業務指示加貼.

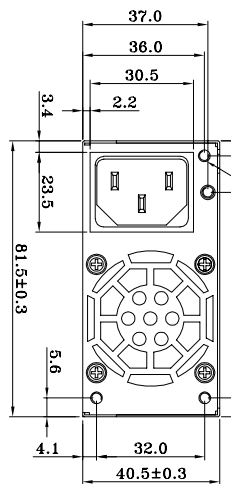

FSP P/N.:9PA180****
SPI P/N.:FSP180PLAR-EFI

MODEL NO. : FSP180-50PLA(S03D)	TITLE: ASSY	SHEET: 1 OF 1	REV:03
R&D	PE	DRAWN	DATE
INTERIOR COUNTERSIGN:			Dec.18.2006
			樂家龍