


3 圖面修改

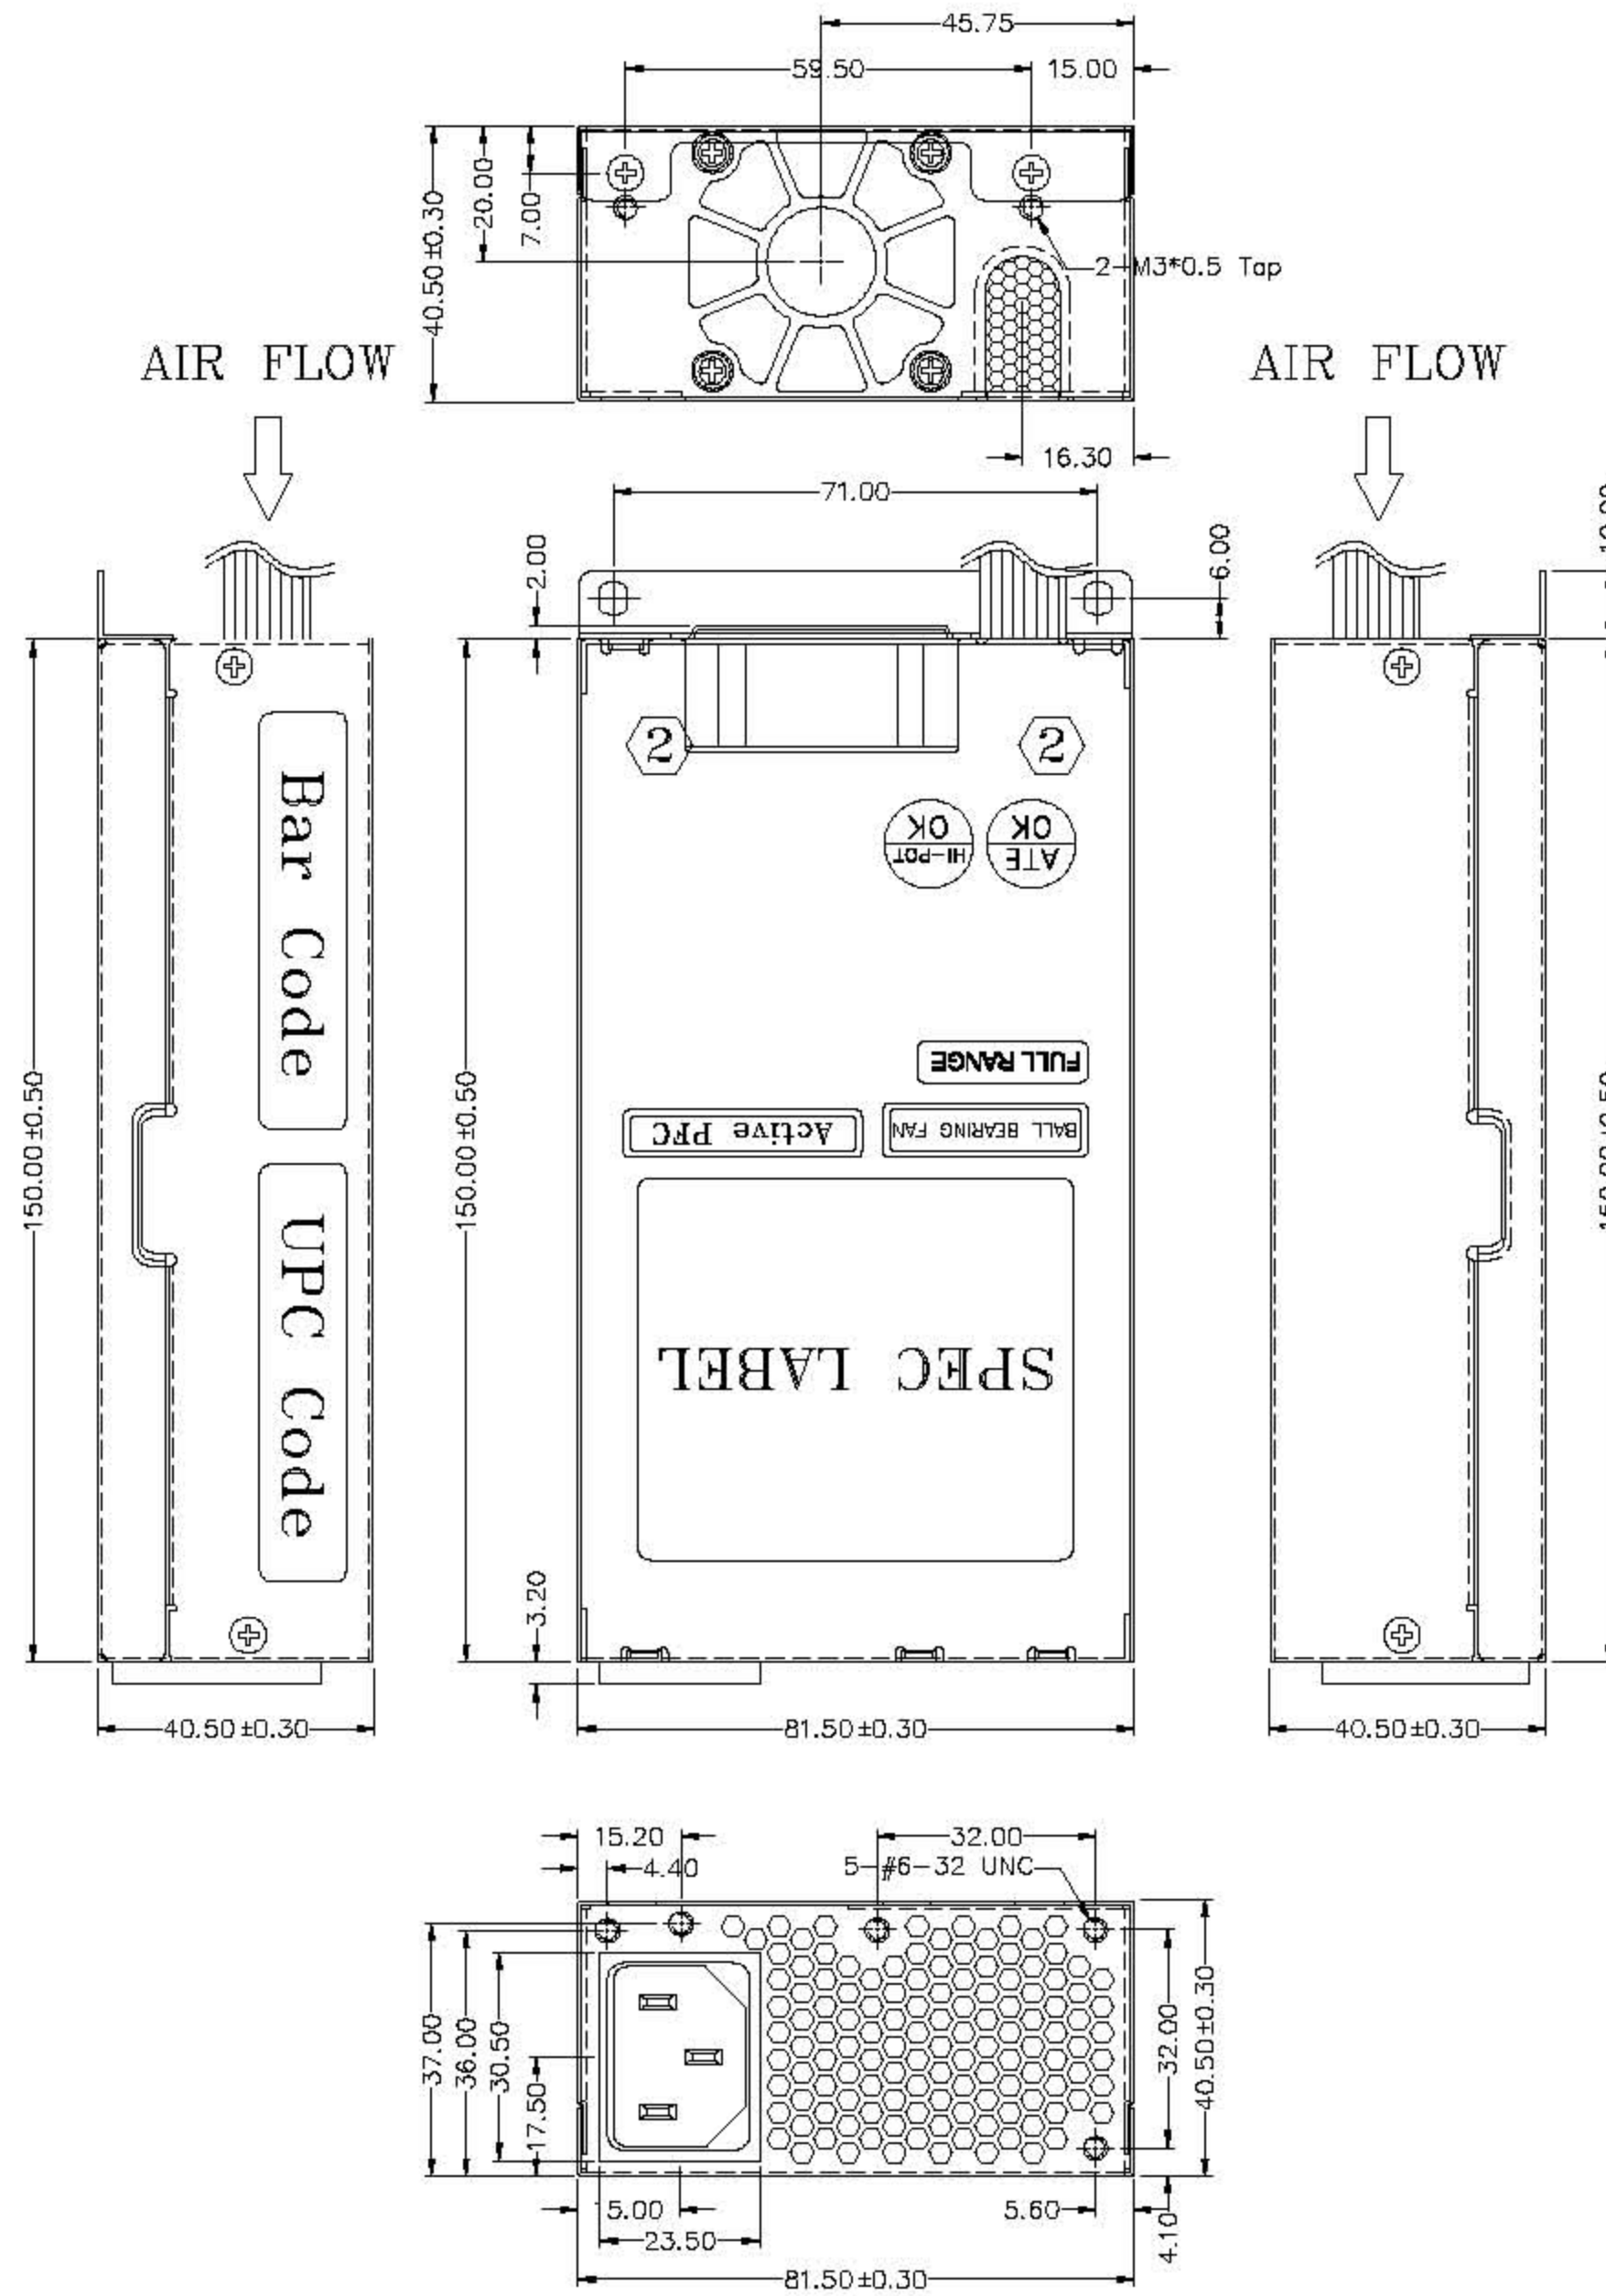

3

REF. D.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	LENGTH		
P1 / 24	1	+3.3V	ORANGE	20	JWT C4202H02 -A20P+ -A4P+ OR EQUIV	200±15 mm		
	2	+3.3V	ORANGE	20				
	3	COM	BLACK	20				
	4	+5V	RED	20				
	5	COM	BLACK	20				
	6	+5V	RED	20				
	7	COM	BLACK	20				
	8	PW-OK	GRAY	24				
	9	+5Vsb	PURPLE	20				
	10	+12V	YELLOW	20				
	11	+12V	YELLOW	20				
	12	+3.3V	ORANGE	20				
	13	+3.3V	BROWN	24				
	14	-12V	BLUE	24				
	15	COM	BLACK	20				
	16	PS-ON	GREEN	24				
	17	COM	BLACK	20				
	18	COM	BLACK	20				
	19	COM	BLACK	20				
	20							
	21	+5V	RED	20				
	22	+5V	RED	20				
	23	+5V	RED	20				
	24	COM	BLACK	20				
PA	1	+12V	YELLOW	20	AMP 1-480424-0 or EQUIV.	250±15 mm		
	2	COM	BLACK	20				
	3	COM	BLACK	20				
	4	+5V	RED	20				
PC	1	+12V	YELLOW	20	AMP 1-480424-0 or EQUIV.	310±15 mm		
	2	COM	BLACK	20				
	3	COM	BLACK	20				
	4	+5V	RED	20				
PB	1	+12V	YELLOW	20	AMP 171822-4 or EQUIV.	150±10 mm		
	2	COM	BLACK	20				
	3	COM	BLACK	20				
	4	+5V	RED	20				
PD	1	+12V	YELLOW	20	AMP 1-480424-0 or EQUIV.	150±10 mm		
	2	COM	BLACK	20				
	3	COM	BLACK	20				
	4	+5V	RED	20				
PE	1	COM	BLACK	20	MOLEX 39-01-2040 or EQUIV.	310±15 mm		
	2	COM	BLACK	20				
	3	+12V	YELLOW	20				
	4	+12V	YELLOW	20				
PF	1	+12V	YELLOW	20	CI1271HS0 -15P or EQUIV.	310±15 mm		
	2	COM	BLACK	20				
	3	+5V	RED	20				
	4	COM	BLACK	20				
	5	+3.3V	ORANGE	20				
PG	1	+12V	YELLOW	20	CI1270H00 -15P or EQUIV.	150±10 mm		
	2	COM	BLACK	20				
	3	+5V	RED	20				
	4	COM	BLACK	20				
	5	+3.3V	ORANGE	20				

FSP P/N.:9PA1803502  
SPI P/N.:SPI180LE

NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 產地標籤依業務指示加貼.
3. PE+12V請插PCB+12V1孔，其餘插+12V2孔

UNIT:mm

MODEL NO. : FSP180-50LE(S03001)		TITLE: ASSY		SHEET: 1 OF 1		REV:03
R&D (2)	PE	DRAWN	DATE			
				Jan.08.2008		
INTERIOR COUNTERSIGN:				黃鈺婷		