


NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 產地標籤依業務指示加貼.

PS: 80 PLUS

UNIT:mm

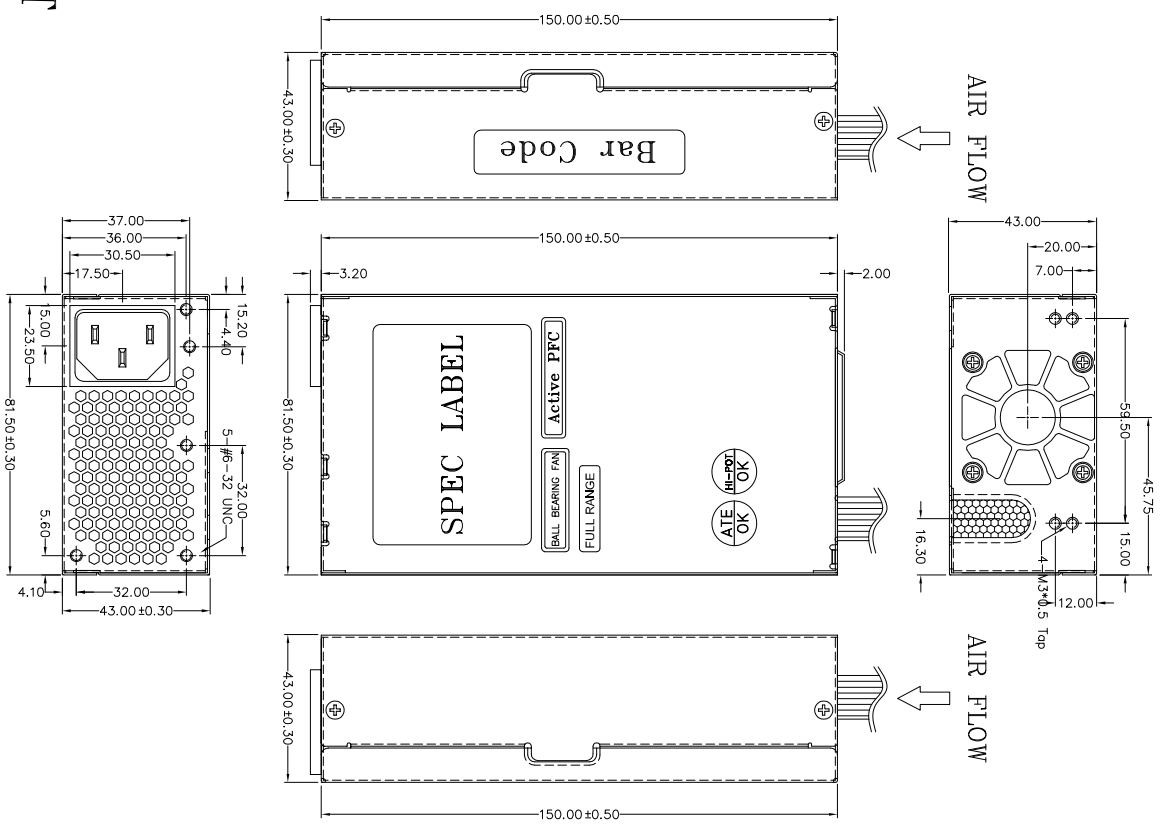

REF. D.	FIN. NO.	SIGNAL	WIRE COLOR	GAUGE	COMPONENT TYPE	LENGTH
1	1	+3.3V	ORANGER	20	MOLEX	200±15
2	2	+3.3V	ORANGER	20	39-01-	200±15
3	3	COM	BLACK	20	39-01- or EQUIV.	
4	4	+5V	RED	20		
5	5	COM	BLACK	20		
6	6	+5V	RED	20		
7	7	COM	BLACK	20		
8	8	PW-OK	GRAY	24		
9	9	+5Vsb	PURPLE	20		
10	10	+12V2	YELLOW	20		
11	11	+3.3V	ORANGER	20		
12	12	+3.3V3	BROWN	24		
13	13	-12V	BLUE	24		
14	14	PS-ON	GREEN	24		
15	15	COM	BLACK	20		
16	16	COM	BLACK	20		
17	17	COM	BLACK	20		
18	18	COM	BLACK	20		
19	19	+5V	RED	20		
20	20	+5V	RED	20		
P1						
1	1	+12V2	YELLOW	20	AMP	250±15
2	2	COM	BLACK	20	1-4044-0 or EQUIV.	
3	3	COM	BLACK	20		
4	4	+5V	RED	20		
PA						
1	1	+12V2	YELLOW	20	AMP	310±15
2	2	COM	BLACK	20	1-4044-0 or EQUIV.	
3	3	COM	BLACK	20		
4	4	+5V	RED	20		
PC						
1	1	+12V2	YELLOW	20	AMP	150±10
2	2	COM	BLACK	20	171822-4 or EQUIV.	
3	3	COM	BLACK	20		
4	4	+5V	RED	20		
PB						
1	1	+12V2	YELLOW	20	AMP	150±10
2	2	COM	BLACK	20	1-4044-0 or EQUIV.	
3	3	COM	BLACK	20		
4	4	+5V	RED	20		
PD						
1	1	+12V2	YELLOW	20	AMP	150±10
2	2	COM	BLACK	20	1-4044-0 or EQUIV.	
3	3	COM	BLACK	20		
4	4	+5V	RED	20		
PE						
1	1	+12V1	Yel/Blk	20	MOLEX	310±15
2	2	COM	BLACK	20	2041-1 or EQUIV.	
3	3	+12V1	Yel/Blk	20		
4	4	+12V1	Yel/Blk	20		
PF						
1	1	+12V2	YELLOW	20	310±15	
2	2	COM	BLACK	20	CL271H90 -1P or EQUIV.	
3	3	+5V	RED	20		
4	4	COM	BLACK	20		
5	5	+3.3V	ORANGER	20		
PG						
1	1	+12V2	YELLOW	20	150±10	
2	2	COM	BLACK	20	CL271H90	
3	3	+5V	RED	20	-1P or EQUIV.	
4	4	COM	BLACK	20		
5	5	+3.3V	ORANGER	20		

FSP P/N.:9PA220****
SPI P/N.:SPI220LE5

MODEL NO. : SPI220LE5	TITLE: ASSY	SHEET: 1 OF 1	REV:01
R&D	PF	DRAWN	DATE
INTERIOR COUNTERSIGN:			Nov.14.2006
			樂家龍